

# Valor LIFT FREESTANDING FIREPLACE™

## LIFT FREESTANDING FIREPLACE COMPONENTS

ENGINES	530ILN	Portrait Log Effect Engine Direct Vent NG
	530ILP	Portrait Log Effect Engine Direct Vent LPG
	530IRN	Portrait Rock Effect Engine Direct Vent NG
	530IRP	Portrait Rock Effect Engine Direct Vent LPG
BODY	575LFC	Lift Freestanding Kit (required)
	578LFC	Lift Front - Charcoal (required)
ACCESSORIES	576LCP	Lower Cover Panel (optional accessory)
	555CFK	Circulating Fan Kit - variable speed, thermally activated
	554LPK	Conversion Kit - NG to LPG
	580EBL	Enamel Black Liner - Reflective (optional accessory)
Contact your local Valor dealer for complete installation requirements		

## MODEL/FUEL

Model	Fuel	Max. Input BTU/hr	Min. Input BTU/hr	Fuel Bed Options	Fan Option	Ener-Guide Rating**	Max. Output** (w/out fan) BTU/hr
530ILN 530IRN	NG	20,500	6,500	Log Rock	Yes	69%	15,250
530ILP 530IRP	LPG	19,000	12,500	Log Rock	Yes	68.3%	14,160

Certified to ANSI Z21.88 / CSA 2.33 Vented Gas Fireplace Heater Standard / CAN 1 - 2.17 Gas Fired Appliances For Use at High Altitude  
 \*\* EnerGuide Ratings and Outputs have been determined without a fan/blower, using the CSA P4.1-02 test method

## ABOUT OUR EFFICIENCY RATINGS

At Valor we use recognized Canadian and US government test methods for determining energy efficiency performance. This ensures our products will perform in your home as rated. Beware of misleading "steady state" efficiency claims made by manufacturers using their own "in-house" test methods. Visit [valorfireplaces.com](http://valorfireplaces.com) for more information.

## LIFT FREESTANDING FIREPLACE




530IL Log Set Engine (shown above) with Lift and Lower Cover Panel (576LCP optional)



530IR Rock Effect Engine (shown below) with Lift

## PRODUCT DIMENSIONS

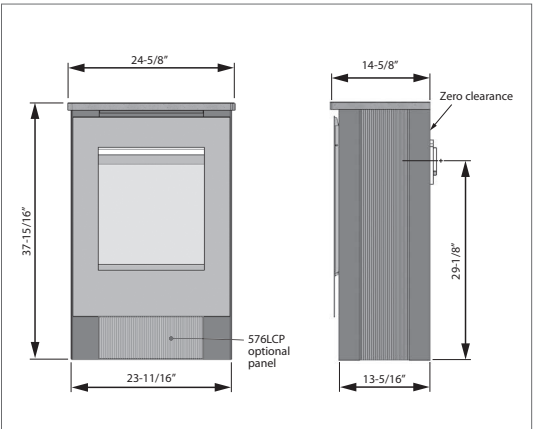

## FIREPLACE SAFETY


## VALOR ZONE & RADIANT COMFORT

Heating your entire home with a central forced air system wastes valuable energy and is often inefficient. An environmentally friendly and cost effective heat source alternative, Valor fireplaces provide steady, radiant warmth directly where you want it - when you want it.

## USE RADIANT HEAT SAFELY

Fireplace surfaces, in particular the glass viewing window, are extremely hot during operation and will remain hot for a period of time after the fireplace is turned off. Contact with the hot glass can cause severe burns. Close adult supervision is required if there are young children, or at-risk individuals in the house. Included with your purchase, a Valor Barrier Screen is recommended at all times. Install an approved aftermarket safety gate to keep toddlers, young children and at-risk individuals a safe distance from the fireplace. For more information please visit [www.valorfireplaces.com/safety](http://www.valorfireplaces.com/safety).

Please Note: All product information is accurate at time of printing and is subject to change. Printed images may vary from actual product. Refer to the Lift and Portrait Series engine manuals for product installation.



Copyright Miles Industries Ltd. 2013

Proudly made in North America  
BRLIFT13E

Your Authorized Valor Dealer

Printed on recycled paper



**valor** PORTRAIT SERIES™

Efficient. Versatile. Distinct.

LIFT FREESTANDING FIREPLACE



**valor**®

THE ORIGINAL  
RADIANT GAS FIREPLACE™

[www.valorfireplaces.com](http://www.valorfireplaces.com)